


BV3-2466T-LD-BSP

Ball valve with 3-pce body, full bore, BSP threaded F/F ISO228/1-G, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036156T1015-A	BV3-2466T-LD-BSP - 1/2" - LEVER
036156T1020-A	BV3-2466T-LD-BSP - 3/4" - LEVER
036156T1025-A	BV3-2466T-LD-BSP - 1" - LEVER
036156T1032-A	BV3-2466T-LD-BSP - 1 1/4" - LEVER
036156T1040-A	BV3-2466T-LD-BSP - 1 1/2" - LEVER
036156T1050-A	BV3-2466T-LD-BSP - 2" - LEVER
036156T1065-A	BV3-2466T-LD-BSP - 2 1/2" - LEVER
036156T1080-A	BV3-2466T-LD-BSP - 3" - LEVER
036156T1100-A	BV3-2466T-LD-BSP - 4" - LEVER

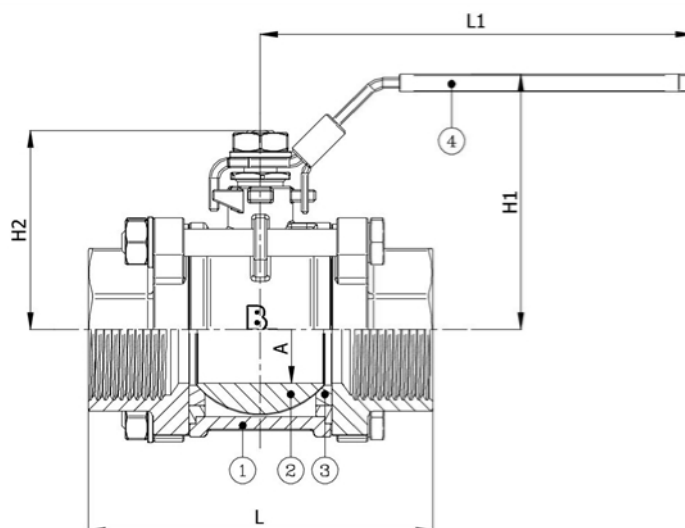

DN/Size	A	H1	H2	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	65	80	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	75	100	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	85	125	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	100	125	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	110	160	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	130	160	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	168	230	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	204	300	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	217	400	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Stainless steel : AISI 201 (EN1.4372)


BV3-2466T-LD-BSP - STE with lever

Ball valve with 3-pce body, full bore, BSP threaded F/F ISO228/1-G, with stainless steel stem extension and lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036156T1S015-A	BV3-2466T-LD-BSP - 1/2" - STE-LEVER
036156T1S020-A	BV3-2466T-LD-BSP - 3/4" - STE-LEVER
036156T1S025-A	BV3-2466T-LD-BSP - 1" - STE-LEVER
036156T1S032-A	BV3-2466T-LD-BSP - 1 1/4" - STE-LEVER
036156T1S040-A	BV3-2466T-LD-BSP - 1 1/2" - STE-LEVER
036156T1S050-A	BV3-2466T-LD-BSP - 2" - STE-LEVER

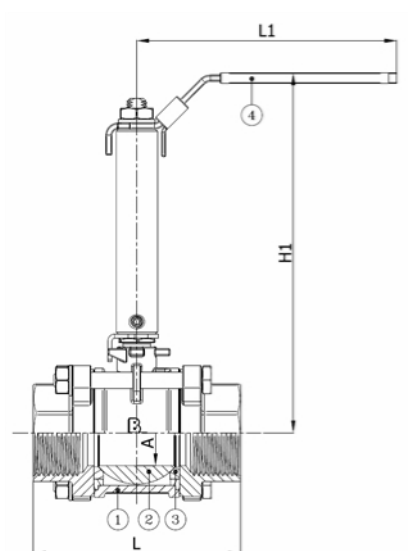

DN/Size	A	H1	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	145	65	80	1000 WOG	0.48
DN20 (3/4")	20	154,7	75	100	1000 WOG	0.72
DN25 (1")	24,5	165,3	85	125	1000 WOG	1.12
DN32 (1 1/4")	32	170,9	100	125	1000 WOG	1.54
DN40 (1 1/2")	38	184	110	160	1000 WOG	2.40
DN50 (2")	50	193,3	130	160	1000 WOG	3.70

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	stainless steel AISI 316


BV3-2466T-LD-BW

Ball valve with 3-pce body, full bore, BW welded ends ASME B16.25 Sched.40, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036856T1015-A	BV3-2466T-LD-BW - 1/2" - LEVER
036856T1020-A	BV3-2466T-LD-BW - 3/4" - LEVER
036856T1025-A	BV3-2466T-LD-BW - 1" - LEVER
036856T1032-A	BV3-2466T-LD-BW - 1 1/4" - LEVER
036856T1040-A	BV3-2466T-LD-BW - 1 1/2" - LEVER
036856T1050-A	BV3-2466T-LD-BW - 2" - LEVER
036856T1065-A	BV3-2466T-LD-BW - 2 1/2" - LEVER
036856T1080-A	BV3-2466T-LD-BW - 3" - LEVER
036856T1100-A	BV3-2466T-LD-BW - 4" - LEVER

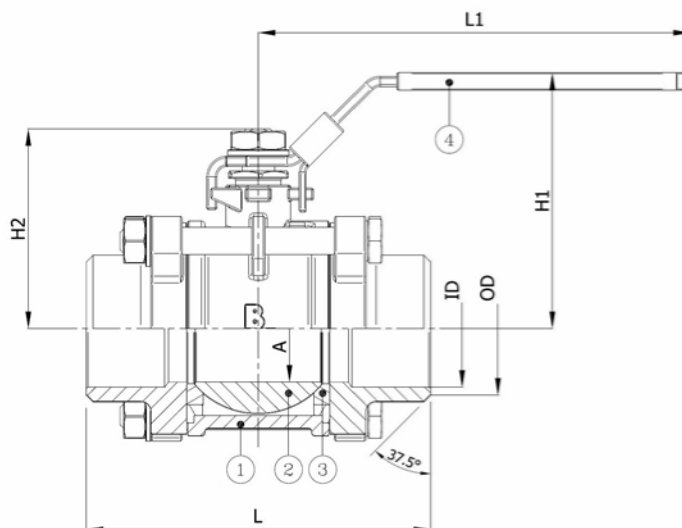

DN/Size	A	H1	H2	ID	OD	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	16	17	65	80	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	20	22	75	100	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	24,5	28	85	125	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	33,8	37	100	125	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	39,8	43	110	160	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	50,8	54	130	160	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	65	77	170	230	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	77,9	90	204	300	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	102,2	107,7	230	400	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Stainless steel : AISI 201 (EN1.4372)


BV3-2466T-LD-NPT

Ball valve with 3-pce body, full bore, NPT threaded F/F ANSI B2.1, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036356T1015-A	BV3-2466T-LD-NPT - 1/2" - LEVER
036356T1020-A	BV3-2466T-LD-NPT - 3/4" - LEVER
036356T1025-A	BV3-2466T-LD-NPT - 1" - LEVER
036356T1032-A	BV3-2466T-LD-NPT - 1 1/4" - LEVER
036356T1040-A	BV3-2466T-LD-NPT - 1 1/2" - LEVER
036356T1050-A	BV3-2466T-LD-NPT - 2" - LEVER
036356T1065-A	BV3-2466T-LD-NPT - 2 1/2" - LEVER
036356T1080-A	BV3-2466T-LD-NPT - 3" - LEVER
036356T1100-A	BV3-2466T-LD-NPT - 4" - LEVER

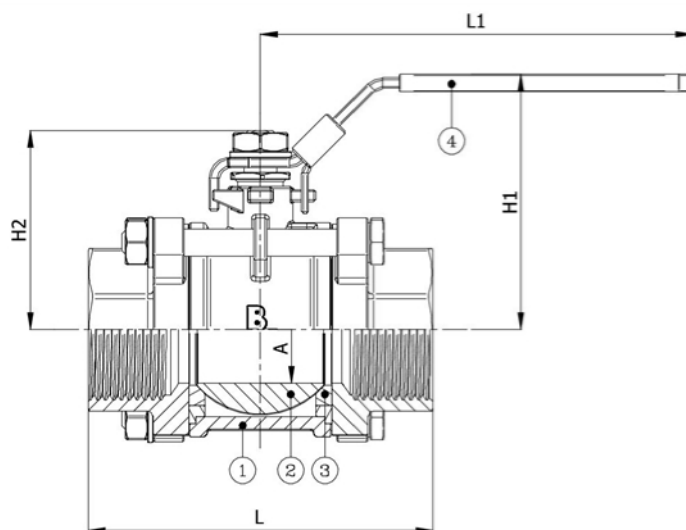

DN/Size	A	H1	H2	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	65	80	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	75	100	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	85	125	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	100	125	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	110	160	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	130	160	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	168	230	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	204	300	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	217	400	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Stainless steel : AISI 201 (EN1.4372)


BV3-2466T-LD-SW

Ball valve with 3-pce body, full bore, SW welding sockets DIN 3239-2, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036956T1015-A	BV3-2466T-LD-SW - 1/2" - LEVER
036956T1020-A	BV3-2466T-LD-SW - 3/4" - LEVER
036956T1025-A	BV3-2466T-LD-SW - 1" - LEVER
036956T1032-A	BV3-2466T-LD-SW - 1 1/4" - LEVER
036956T1040-A	BV3-2466T-LD-SW - 1 1/2" - LEVER
036956T1050-A	BV3-2466T-LD-SW - 2" - LEVER
036956T1065-A	BV3-2466T-LD-SW - 2 1/2" - LEVER
036956T1080-A	BV3-2466T-LD-SW - 3" - LEVER
036956T1100-A	BV3-2466T-LD-SW - 4" - LEVER

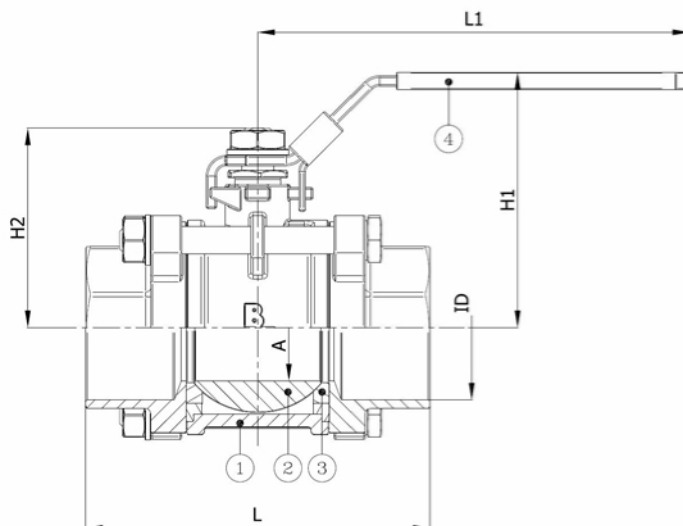

DN/Size	A	H1	H2	ID	L	L1	SW	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	22	65	80	22	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	27,5	75	100	27,5	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	34,5	85	125	34,5	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	43	100	125	43	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	49	110	160	49	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	61,5	130	160	61,5	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	74	168	230	74	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	90	204	300	90	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	115,6	217	400	115,6	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Stainless steel : AISI 201 (EN1.4372)