


BV3-2466T-BSP - Lever

Ball valve with 3-pce body, full bore, BSP threaded F/F ISO7/1-Rp, ISO 5211 mounting platform, with lever
Face to Face Standard: Factory standard



Item Number	Belven Ref
036157T1008	BV3-2466T-BSP - 1/4" - LEVER
036157T1010	BV3-2466T-BSP - 3/8" - LEVER
036157T1015	BV3-2466T-BSP - 1/2" - LEVER
036157T1020	BV3-2466T-BSP - 3/4" - LEVER
036157T1025	BV3-2466T-BSP - 1" - LEVER
036157T1032	BV3-2466T-BSP - 1 1/4" - LEVER
036157T1040	BV3-2466T-BSP - 1 1/2" - LEVER
036157T1050	BV3-2466T-BSP - 2" - LEVER
036157T1065	BV3-2466T-BSP - 2 1/2" - LEVER
036157T1080	BV3-2466T-BSP - 3" - LEVER
036157T1100	BV3-2466T-BSP - 4" - LEVER

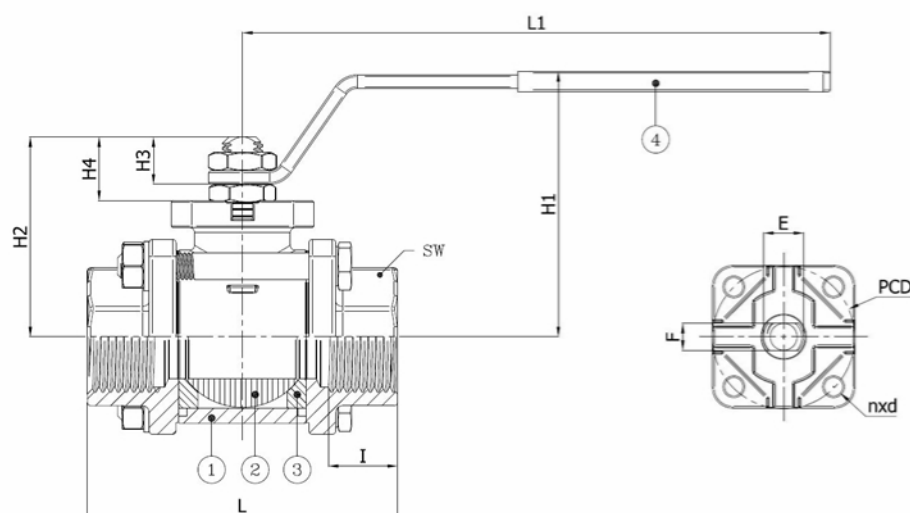

DN/Size	F	H1	H2	H3	H4	I	L	L1	ISO	PCD	n x d	E	SW	Press.Cl.	Weight(kg)
DN08 (1/4")	5	50	35	9	13,5	11	57	110				8	22	PN64	0.30
DN10 (3/8")	5	50	35	9	13,5	11,4	57	110				8	22	PN64	0.30
DN15 (1/2")	7	64	47	10	15	15	65	131	F03	36	4 x 6	10	27	PN64	0.50
DN20 (3/4")	7	68	52	10	16	16,3	76	131	F04	42	4 x 5,5	10	32	PN40	0.70
DN25 (1")	8	79	60	12,5	19,5	19,1	92	174	F04	42	4 x 6	12	41	PN40	1.20
DN32 (1 1/4")	8	83	64	12,5	19,5	21,4	106	174	F04	42	4 x 5,5	12	50	PN25	1.70
DN40 (1 1/2")	10	100	79	16,5	24	21,5	116	250	F05	50	4 x 6,5	16	55	PN25	2.50
DN50 (2")	10	107	86	16,5	24	25,7	136	250	F05	50	4 x 6,5	16	70	PN25	3.90
DN65 (2 1/2")	14	126	103	18	28	30,2	153	321	F07	70	4 x M8	20	90	PN16	8.15
DN80 (3")	14	137	114	18	28	33,3	180	321	F07	70	4 x M8	20	105	PN16	12.80
DN100 (4")	18	156	137	22	34,5	39,3	217	381	F10	102	4 x M10	24	130	PN16	21.50

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Carbon steel


BV3-2466T-NPT - Lever

Ball valve with 3-pce body, full bore, NPT threaded F/F, ISO 5211 mounting platform, with lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036357T1008	BV3-2466T-NPT - 1/4" - LEVER
036357T1010	BV3-2466T-NPT - 3/8" - LEVER
036357T1015	BV3-2466T-NPT - 1/2" - LEVER
036357T1020	BV3-2466T-NPT - 3/4" - LEVER
036357T1025	BV3-2466T-NPT - 1" - LEVER
036357T1032	BV3-2466T-NPT - 1 1/4" - LEVER
036357T1040	BV3-2466T-NPT - 1 1/2" - LEVER
036357T1050	BV3-2466T-NPT - 2" - LEVER
036357T1065	BV3-2466T-NPT - 2 1/2" - LEVER
036357T1080	BV3-2466T-NPT - 3" - LEVER
036357T1100	BV3-2466T-NPT - 4" - LEVER

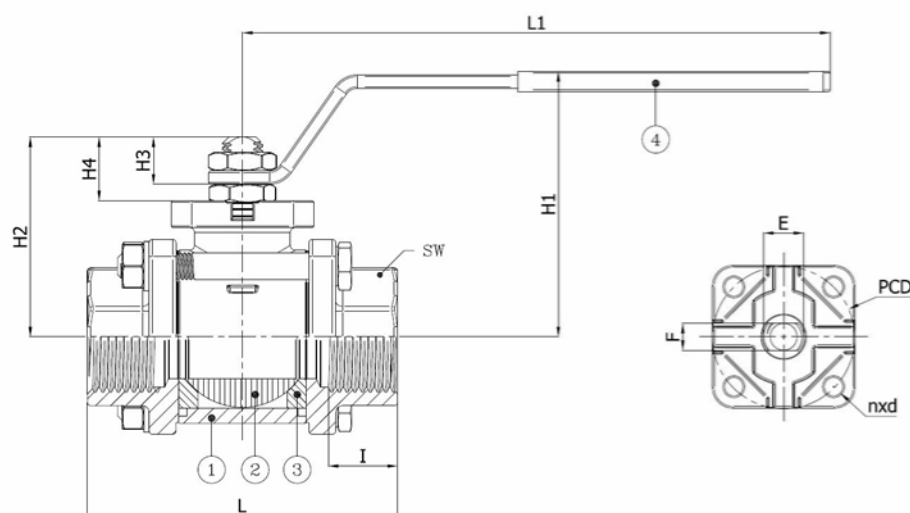

DN/Size	F	H1	H2	H3	H4	I	L	L1	ISO	PCD	n x d	E	SW	Press.Cl.	Weight(kg)
DN08 (1/4")	5	50	35	9	13,5	11	57	110				8	22	PN64	0.30
DN10 (3/8")	5	50	35	9	13,5	11,4	57	110				8	22	PN64	0.30
DN15 (1/2")	7	64	47	10	15	15	65	131	F03	36	4 x 6	10	27	PN64	0.50
DN20 (3/4")	7	68	52	10	16	16,3	76	131	F04	42	4 x 5,5	10	32	PN40	0.70
DN25 (1")	8	79	60	12,5	19,5	19,1	92	174	F04	42	4 x 6	12	41	PN40	1.20
DN32 (1 1/4")	8	83	64	12,5	19,5	21,4	106	174	F04	42	4 x 5,5	12	50	PN25	1.70
DN40 (1 1/2")	10	100	79	16,5	24	21,5	116	250	F05	50	4 x 6,5	16	55	PN25	2.50
DN50 (2")	10	107	86	16,5	24	25,7	136	250	F05	50	4 x 6,5	16	70	PN25	3.90
DN65 (2 1/2")	14	126	103	18	28	30,2	153	321	F07	70	4 x M8	20	90	PN16	8.15
DN80 (3")	14	137	114	18	28	33,3	180	321	F07	70	4 x M8	20	105	PN16	12.80
DN100 (4")	18	156	137	22	34,5	39,3	217	381	F10	102	4 x M10	24	130	PN16	21.50

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Carbon steel


BV3-2466T-BW - Lever

Ball valve with 3-pce body, full bore, BW welding ends, ISO 5211 mounting platform, with lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036857T1010	BV3-2466T-BW - 3/8" - LEVER
036857T1015	BV3-2466T-BW - 1/2" - LEVER
036857T1020	BV3-2466T-BW - 3/4" - LEVER
036857T1025	BV3-2466T-BW - 1" - LEVER
036857T1032	BV3-2466T-BW - 1 1/4" - LEVER
036857T1040	BV3-2466T-BW - 1 1/2" - LEVER
036857T1050	BV3-2466T-BW - 2" - LEVER
036857T1065	BV3-2466T-BW - 2 1/2" - LEVER
036857T1080	BV3-2466T-BW - 3" - LEVER
036857T1100	BV3-2466T-BW - 4" - LEVER

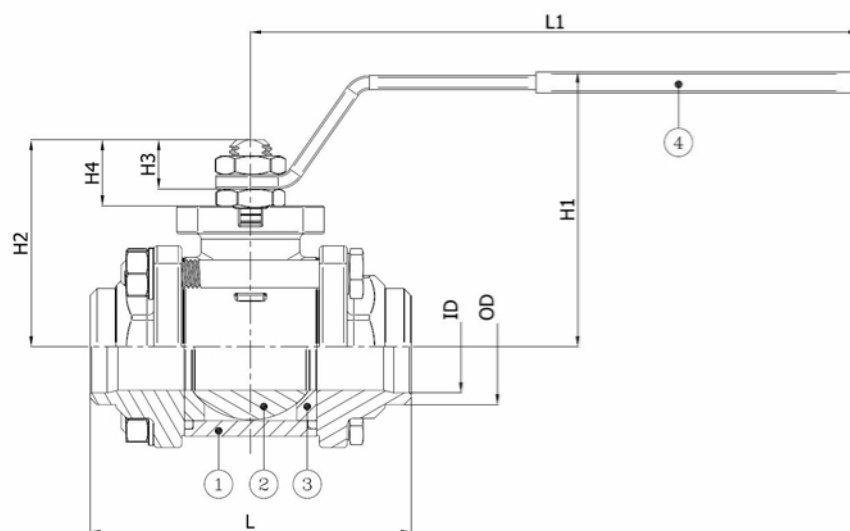

DN/Size	F	H1	H2	H3	H4	ID	OD	L	L1	ISO	PCD	n x d	E	Press.Cl.	Weight(kg)
DN10 (3/8")	5	50	35	9	13,5	12,48	17,1	57	110				8	PN64	0.30
DN15 (1/2")	7	64	47	10	15	15,76	21,3	65	131	F03	36	4 x 6	10	PN64	0.50
DN20 (3/4")	7	68	52	10	16	20,96	26,7	76	131	F04	42	4 x 5,5	10	PN40	0.70
DN25 (1")	8	79	60	12,5	19,5	26,64	33,4	92	174	F04	42	4 x 6	12	PN40	1.20
DN32 (1 1/4")	8	83	64	12,5	19,5	35,08	42,2	106	174	F04	42	4 x 5,5	12	PN25	1.70
DN40 (1 1/2")	10	100	79	16,5	24	40,94	48,3	116	250	F05	50	4 x 6,5	16	PN25	2.50
DN50 (2")	10	107	86	16,5	24	52,48	60,3	136	250	F05	50	4 x 6,5	16	PN25	3.90
DN65 (2 1/2")	14	126	103	18	28	62,58	73	153	321	F07	70	4 x M8	20	PN16	8.15
DN80 (3")	14	137	114	18	28	77,92	88,9	180	321	F07	70	4 x M8	20	PN16	12.80
DN100 (4")	18	156	137	22	34,5	102,26	114,3	217	381	F10	102	4 x M10	24	PN16	21.50

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Carbon steel


BV3-2466T-SW - Lever

Ball valve with 3-pce body, full bore, SW welding sockets, ISO 5211 mounting platform, with lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036957T1010	BV3-2466T-SW - 3/8" - LEVER
036957T1015	BV3-2466T-SW - 1/2" - LEVER
036957T1020	BV3-2466T-SW - 3/4" - LEVER
036957T1025	BV3-2466T-SW - 1" - LEVER
036957T1032	BV3-2466T-SW - 1 1/4" - LEVER
036957T1040	BV3-2466T-SW - 1 1/2" - LEVER
036957T1050	BV3-2466T-SW - 2" - LEVER
036957T1065	BV3-2466T-SW - 2 1/2" - LEVER
036957T1080	BV3-2466T-SW - 3" - LEVER
036957T1100	BV3-2466T-SW - 4" - LEVER

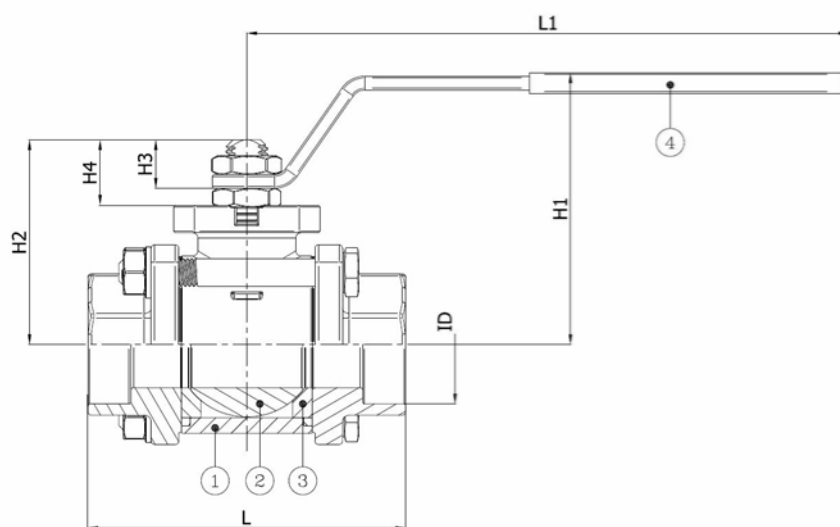

DN/Size	F	H1	H2	H3	H4	I	ID	L	L1	ISO	PCD	n x d	E	Press.Cl.	Weight(kg)
DN10 (3/8")	5	50	35	9	13,5	9,5	18,2	57	110				8	PN64	0.30
DN15 (1/2")	7	64	47	10	15	9,5	22,4	65	131	F03	36	4 x 6	10	PN64	0.50
DN20 (3/4")	7	68	52	10	16	11,1	27,7	76	131	F04	42	4 x 5,5	10	PN40	0.70
DN25 (1")	8	79	60	12,5	19,5	12,7	34,5	92	174	F04	42	4 x 6	12	PN40	1.20
DN32 (1 1/4")	8	83	64	12,5	19,5	14,3	43,2	106	174	F04	42	4 x 5,5	12	PN25	1.70
DN40 (1 1/2")	10	100	79	16,5	24	15,9	49,5	116	250	F05	50	4 x 6,5	16	PN25	2.50
DN50 (2")	10	107	86	16,5	24	17,5	62	136	250	F05	50	4 x 6,5	16	PN25	3.90
DN65 (2 1/2")	14	126	103	18	28	20	76,5	153	321	F07	70	4 x M8	20	PN16	8.15
DN80 (3")	14	137	114	18	28	20	89,5	180	321	F07	70	4 x M8	20	PN16	12.80
DN100 (4")	18	156	137	22	34,5	20	115	217	381	F10	102	4 x M10	24	PN16	21.50

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Carbon steel : A216 WCB	Stainless steel : A351 CF8/A182-F304	PTFE	Carbon steel