


BV3-6666T-LD-BSP

Ball valve with 3-pce body, full bore, BSP threaded F/F ISO228/1-G, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036177T1015-A	BV3-6666T-LD-BSP - 1/2" - LEVER
036177T1020-A	BV3-6666T-LD-BSP - 3/4" - LEVER
036177T1025-A	BV3-6666T-LD-BSP - 1" - LEVER
036177T1032-A	BV3-6666T-LD-BSP - 1 1/4" - LEVER
036177T1040-A	BV3-6666T-LD-BSP - 1 1/2" - LEVER
036177T1050-A	BV3-6666T-LD-BSP - 2" - LEVER
036177T1065-A	BV3-6666T-LD-BSP - 2 1/2" - LEVER
036177T1080-A	BV3-6666T-LD-BSP - 3" - LEVER
036177T1100-A	BV3-6666T-LD-BSP - 4" - LEVER

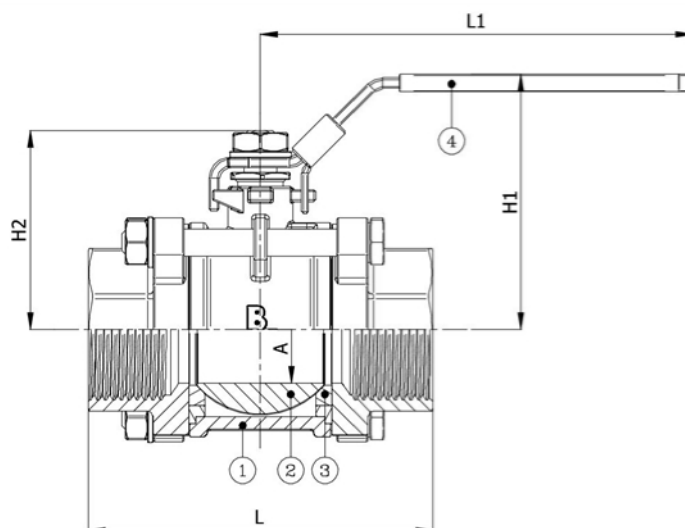

DN/Size	A	H1	H2	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	65	80	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	75	100	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	85	125	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	100	125	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	110	160	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	130	160	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	168	230	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	204	300	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	217	400	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	Stainless steel : AISI 201 (EN1.4372)


BV3-6666T-LD-BSP - STE with lever

Ball valve with 3-pce body, full bore, BSP threaded F/F ISO228/1-G, with stainless steel stem extension and lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036177T1S015-A	BV3-6666T-LD-BSP - 1/2" - STE-LEVER
036177T1S020-A	BV3-6666T-LD-BSP - 3/4" - STE-LEVER
036177T1S025-A	BV3-6666T-LD-BSP - 1" - STE-LEVER
036177T1S032-A	BV3-6666T-LD-BSP - 1 1/4" - STE-LEVER
036177T1S040-A	BV3-6666T-LD-BSP - 1 1/2" - STE-LEVER
036177T1S050-A	BV3-6666T-LD-BSP - 2" - STE-LEVER

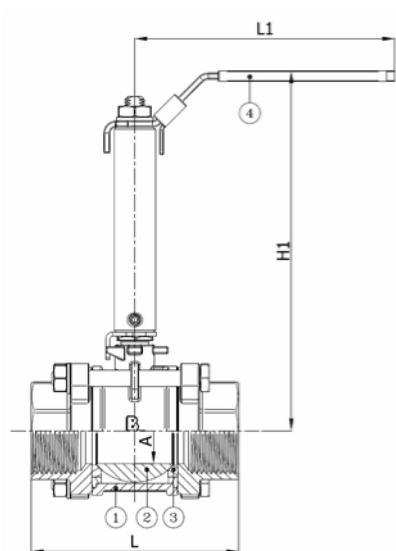

DN/Size	A	H1	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	145	65	80	1000 WOG	0.48
DN20 (3/4")	20	154,7	75	100	1000 WOG	0.72
DN25 (1")	24,5	165,3	85	125	1000 WOG	1.12
DN32 (1 1/4")	32	170,9	100	125	1000 WOG	1.54
DN40 (1 1/2")	38	184	110	160	1000 WOG	2.40
DN50 (2")	50	193,3	130	160	1000 WOG	3.70

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	stainless steel AISI 316


BV3-6666T-LD-NPT

Ball valve with 3-pce body, full bore, NPT threaded F/F ANSI B2.1, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036377T1015-A	BV3-6666T-LD-NPT - 1/2" - LEVER
036377T1020-A	BV3-6666T-LD-NPT - 3/4" - LEVER
036377T1025-A	BV3-6666T-LD-NPT - 1" - LEVER
036377T1032-A	BV3-6666T-LD-NPT - 1 1/4" - LEVER
036377T1040-A	BV3-6666T-LD-NPT - 1 1/2" - LEVER
036377T1050-A	BV3-6666T-LD-NPT - 2" - LEVER
036377T1065-A	BV3-6666T-LD-NPT - 2 1/2" - LEVER
036377T1080-A	BV3-6666T-LD-NPT - 3" - LEVER
036377T1100-A	BV3-6666T-LD-NPT - 4" - LEVER

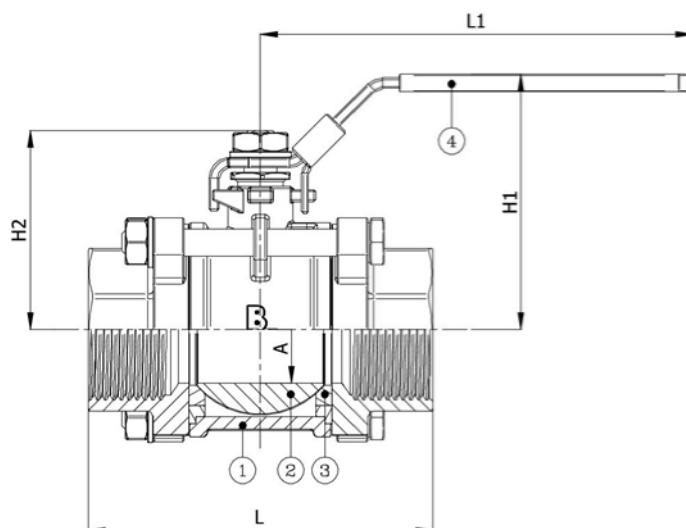

DN/Size	A	H1	H2	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	65	80	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	75	100	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	85	125	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	100	125	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	110	160	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	130	160	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	168	230	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	204	300	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	217	400	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	Stainless steel : AISI 201 (EN1.4372)


BV3-6666T-LD-BW

Ball valve with 3-pce body, full bore, BW welded ends ASME B16.25 Sched.40, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036877T1015-A	BV3-6666T-LD-BW - 1/2" - LEVER
036877T1020-A	BV3-6666T-LD-BW - 3/4" - LEVER
036877T1025-A	BV3-6666T-LD-BW - 1" - LEVER
036877T1032-A	BV3-6666T-LD-BW - 1 1/4" - LEVER
036877T1040-A	BV3-6666T-LD-BW - 1 1/2" - LEVER
036877T1050-A	BV3-6666T-LD-BW - 2" - LEVER
036877T1065-A	BV3-6666T-LD-BW - 2 1/2" - LEVER
036877T1080-A	BV3-6666T-LD-BW - 3" - LEVER
036877T1100-A	BV3-6666T-LD-BW - 4" - LEVER

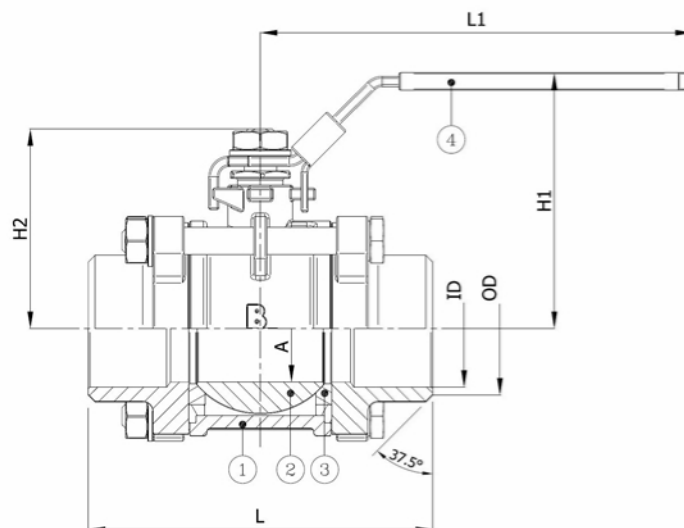

DN/Size	A	H1	H2	ID	OD	L	L1	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	16	17	65	80	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	20	22	75	100	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	24,5	28	85	125	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	33,8	37	100	125	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	39,8	43	110	160	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	50,8	54	130	160	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	65	77	170	230	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	77,9	90	204	300	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	102,2	107,7	230	400	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	Stainless steel : AISI 201 (EN1.4372)


BV3-6666T-LD-SW

Ball valve with 3-pce body, full bore, SW welding sockets DIN 3239-2, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
036977T1015-A	BV3-6666T-LD-SW - 1/2" - LEVER
036977T1020-A	BV3-6666T-LD-SW - 3/4" - LEVER
036977T1025-A	BV3-6666T-LD-SW - 1" - LEVER
036977T1032-A	BV3-6666T-LD-SW - 1 1/4" - LEVER
036977T1040-A	BV3-6666T-LD-SW - 1 1/2" - LEVER
036977T1050-A	BV3-6666T-LD-SW - 2" - LEVER
036977T1065-A	BV3-6666T-LD-SW - 2 1/2" - LEVER
036977T1080-A	BV3-6666T-LD-SW - 3" - LEVER
036977T1100-A	BV3-6666T-LD-SW - 4" - LEVER

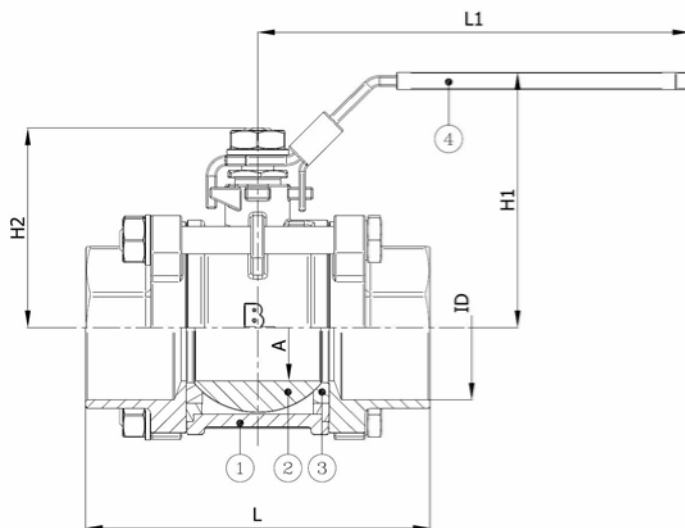

DN/Size	A	H1	H2	ID	L	L1	SW	Press.Cl.	Weight(kg)
DN15 (1/2")	15	57,5	38,4	22	65	80	22	1000 WOG	0.34
DN20 (3/4")	20	62,5	42,5	27,5	75	100	27,5	1000 WOG	0.58
DN25 (1")	24,5	72	50,2	34,5	85	125	34,5	1000 WOG	0.88
DN32 (1 1/4")	32	78,3	56,5	43	100	125	43	1000 WOG	1.30
DN40 (1 1/2")	38	88,6	68,7	49	110	160	49	1000 WOG	2.02
DN50 (2")	50	101,4	81,5	61,5	130	160	61,5	1000 WOG	3.27
DN65 (2 1/2")	65	130,6	113	74	168	230	74	1000 WOG	8.92
DN80 (3")	76,2	148,8	126,9	90	204	300	90	1000 WOG	15.18
DN100 (4")	100	174,25	137,3	115,6	217	400	115,6	1000 WOG	23.88

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	Stainless steel : AISI 201 (EN1.4372)