


BV12-2466T-PN10/16 - Lever

Lug type butterfly valve, mounting between flanges PN10/PN16, with lever

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref
121026T1050	BV12-2466T-PN16-DN050 - LEVER
121026T1065	BV12-2466T-PN16-DN065 - LEVER
121026T1080	BV12-2466T-PN16-DN080 - LEVER
121026T1100	BV12-2466T-PN16-DN100 - LEVER
121026T1125	BV12-2466T-PN16-DN125 - LEVER
121026T1150	BV12-2466T-PN16-DN150 - LEVER

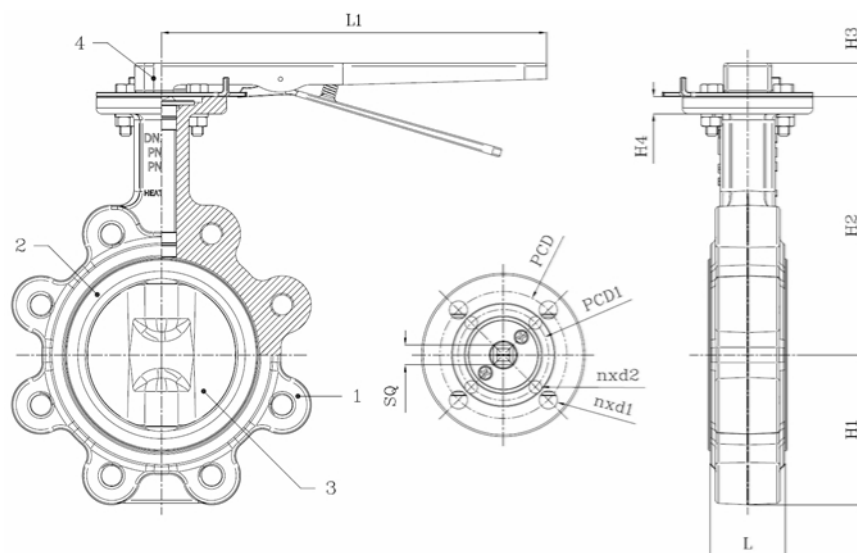

DN/Size	H1	H2	H3	H4	L	L1	SQ	ISO	PCD	PCD1	n x d1	n x d2	Press.Cl.	Weight(kg)
DN50 (2")	71,4	142,7	22	12	43	266	11	F05/F07	70	50	4 x d10	4 x d7	PN10	4.00
DN65 (2 1/2")	77,8	155,4	22	12	46	266	11	F05/F07	70	50	4 x d10	4 x d7	PN10	4.60
DN80 (3")	89	161,8	22	12	46	266	11	F05/F07	70	50	4 x d10	4 x d7	PN10	5.30
DN100 (4")	102	178	22	12	52	266	14	F07	70		4 x d10		PN10	7.80
DN125 (5")	123	190,5	22	12	56	266	14	F07	70		4 x d10		PN10	9.70
DN150 (6")	138	205,2	22	12	56	266	14	F07	70		4 x d10		PN10	11.50

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	PTFE	Stainless steel : CF8M	Maellable iron


BV12-2466T-PN10 - Lever

Lug type butterfly valve, mounting between flanges PN10, with lever

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref
121026T1200	BV12-2466T-PN10-DN200 - LEVER
121026T1250	BV12-2466T-PN10-DN250 - LEVER
121026T1300	BV12-2466T-PN10-DN300 - LEVER

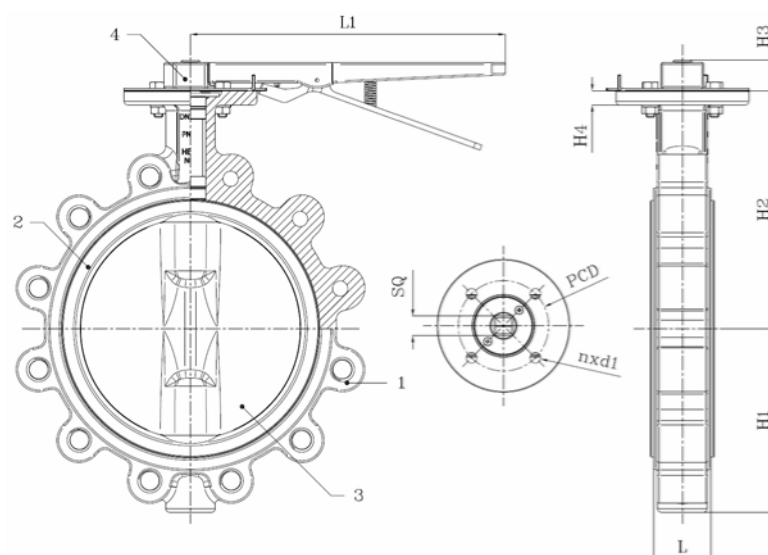

DN/Size	H1	H2	H3	H4	L	L1	SQ	ISO	PCD	n x d1	Press.Cl.	Weight(kg)
DN200 (8")	168	237	34,5	16	60	356	17	F10	102	4 x d12	PN10	18.00
DN250 (10")	207	268,3	34,5	16	68	356	22	F10	102	4 x d12	PN10	31.50
DN300 (12")	243,5	308,5	34,5	16	78	356	27	F12	125	4 x d14	PN10	46.50

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	PTFE	Stainless steel : CF8M	Maellable iron


BV12-2466T-PN16 - Lever

Lug type butterfly valve, mounting between flanges PN16, with lever

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref
121126T1200	BV12-2466T-PN16-DN200 - LEVER
121126T1250	BV12-2466T-PN16-DN250 - LEVER
121126T1300	BV12-2466T-PN16-DN300 - LEVER

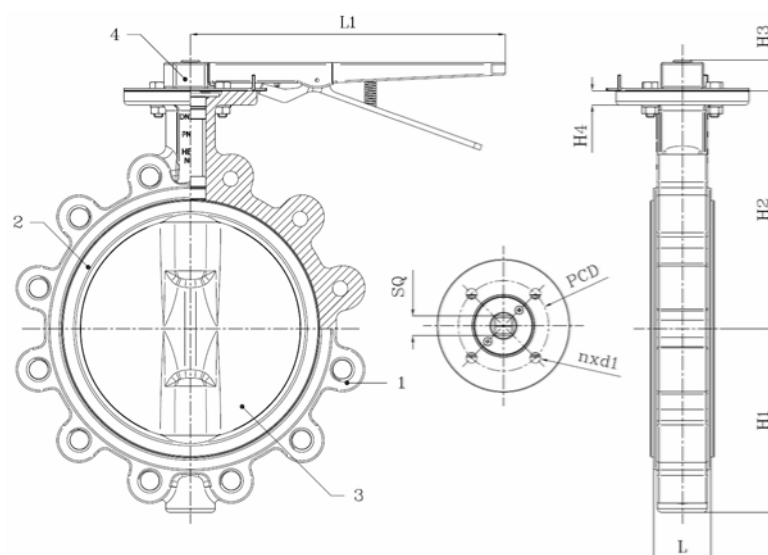

DN/Size	H1	H2	H3	H4	L	L1	SQ	ISO	PCD	n x d1	Press.Cl.	Weight(kg)
DN200 (8")	168	237	34,5	16	60	356	17	F10	102	4 x d12	PN10	18.00
DN250 (10")	207	268,3	34,5	16	68	356	22	F10	102	4 x d12	PN10	31.50
DN300 (12")	243,5	308,5	34,5	16	78	356	27	F12	125	4 x d14	PN10	46.50

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	PTFE	Stainless steel : CF8M	Maellable iron


BV12-2466T-PN10/16 - Gearbox

Lug type butterfly valve, mounting between flanges PN10/PN16, with gearbox

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref
121026T3050	BV12-2466T-PN16-DN050 - GEARBOX
121026T3065	BV12-2466T-PN16-DN065 - GEARBOX
121026T3080	BV12-2466T-PN16-DN080 - GEARBOX
121026T3100	BV12-2466T-PN16-DN100 - GEARBOX
121026T3125	BV12-2466T-PN16-DN125 - GEARBOX
121026T3150	BV12-2466T-PN16-DN150 - GEARBOX

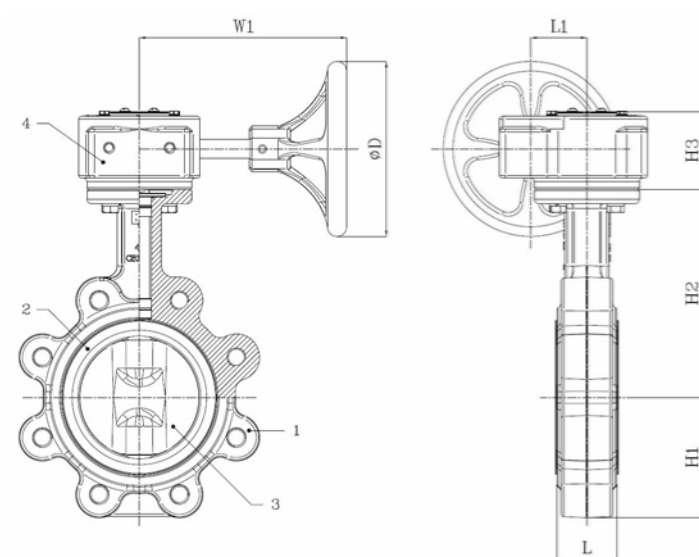

DN/Size	D	H1	H2	H3	L	L1	W1	Press.Cl.	Weight(kg)
DN50 (2")	150	71,4	142,7	56,5	43	45	173,5	PN10	6.90
DN65 (2 1/2")	150	77,8	155,4	56,5	46	45	173,5	PN10	7.50
DN80 (3")	150	89	161,8	56,5	46	45	173,5	PN10	8.20
DN100 (4")	150	102	178	56,5	52	45	170	PN10	11.60
DN125 (5")	150	123	190,5	56,5	56	45	170	PN10	13.60
DN150 (6")	150	138	205,2	56,5	56	45	170	PN10	15.30

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	PTFE	Stainless steel : CF8M	Cast iron


BV12-2466T-PN10 - Gearbox

Lug type butterfly valve, mounting between flanges PN10, with gearbox

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref
121026T3200	BV12-2466T-PN10-DN200 - GEARBOX
121026T3250	BV12-2466T-PN10-DN250 - GEARBOX
121026T3300	BV12-2466T-PN10-DN300 - GEARBOX

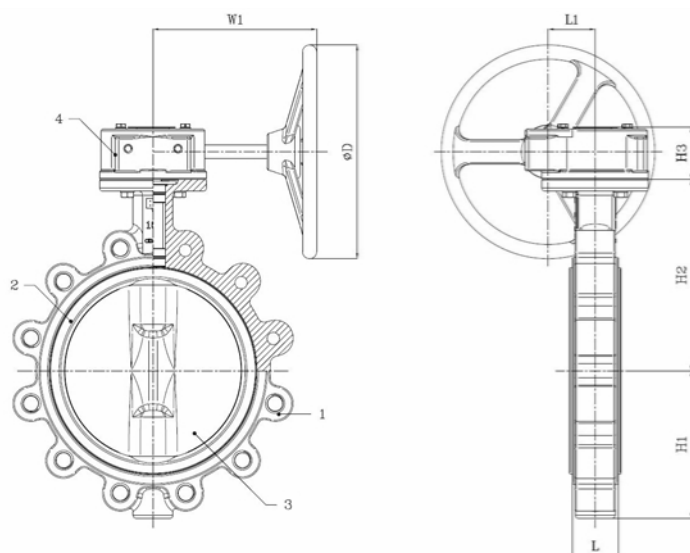

DN/Size	D	H1	H2	H3	L	L1	W1	Press.Cl.	Weight(kg)
DN200 (8")	300	168	237	80,5	60	63	237	PN10	26.50
DN250 (10")	300	207	268,3	80,5	68	63	237	PN10	36.50
DN300 (12")	300	243,5	308,5	80,5	78	78	225	PN10	67.00

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	PTFE	Stainless steel : CF8M	Cast iron


BV12-2466T-PN16 - Gearbox

Lug type butterfly valve, mounting between flanges PN16, with gearbox

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref
121126T3200	BV12-2466T-PN16-DN200 - GEARBOX
121126T3250	BV12-2466T-PN16-DN250 - GEARBOX
121126T3300	BV12-2466T-PN16-DN300 - GEARBOX

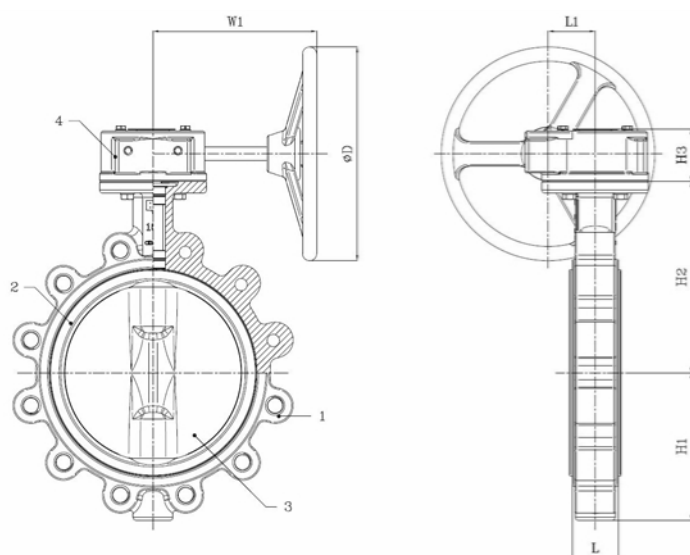

DN/Size	D	H1	H2	H3	L	L1	W1	Press.Cl.	Weight(kg)
DN200 (8")	300	168	237	80,5	60	63	237	PN10	27.00
DN250 (10")	300	207	268,3	80,5	68	63	237	PN10	36.00
DN300 (12")	300	243,5	308,5	80,5	78	78	225	PN10	67.00

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	PTFE	Stainless steel : CF8M	Cast iron