


BV49A-3434B-F4-PN10/PN16 - HANDWHEEL

Gate valve, flanged PN16, resilient seated, F4 short face to face, with handwheel

Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref
49A3444B2040	BV49A-3434B-F4-PN16 DN040 - HANDWHEEL
49A3444B2050	BV49A-3434B-F4-PN16 DN050 - HANDWHEEL
49A3444B2065	BV49A-3434B-F4-PN16 DN065 - HANDWHEEL
49A3444B2080	BV49A-3434B-F4-PN16 DN080 - HANDWHEEL
49A3444B2100	BV49A-3434B-F4-PN16 DN100 - HANDWHEEL
49A3444B2125	BV49A-3434B-F4-PN16 DN125 - HANDWHEEL
49A3444B2150	BV49A-3434B-F4-PN16 DN150 - HANDWHEEL

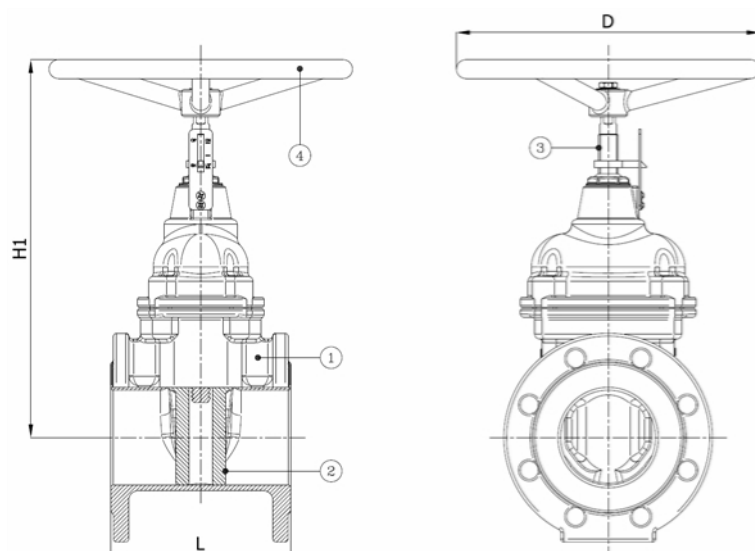

DN/Size	D	H1	L	Press.Cl.	Weight(kg)
DN40 (1 1/2")	200	264	140	PN16	7.90
DN50 (2")	200	280,5	150	PN16	10.20
DN65 (2 1/2")	250	311,5	170	PN16	12.50
DN80 (3")	250	367	180	PN16	16.40
DN100 (4")	320	398,5	190	PN16	21.60
DN125 (5")	320	463,5	200	PN16	29.30
DN150 (6")	320	501	210	PN16	37.00

Item 1	Item 2	Item 3	Item 4
Body Material	Wedge Material	Stem Material	Actuator Material
Ductile iron : GGG50 + Epoxy coating	NBR vulcanized on ductile iron core GGG50	Stainless steel : AISI 420	Steel


BV49A-3434B-F4-PN16 - HANDWHEEL

Gate valve, flanged PN16, resilient seated, F4 short face to face, with handwheel

Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref
49A3444B2200	BV49A-3434B-F4-PN16 DN200 - HANDWHEEL
49A3444B2250	BV49A-3434B-F4-PN16 DN250 - HANDWHEEL
49A3444B2300	BV49A-3434B-F4-PN16 DN300 - HANDWHEEL
49A3444B2350	BV49A-3434B-F4-PN16 DN350 - HANDWHEEL
49A3444B2400	BV49A-3434B-F4-PN16 DN400 - HANDWHEEL
49A3444B2450	BV49A-3434B-F4-PN16 DN450 - HANDWHEEL
49A3444B2500	BV49A-3434B-F4-PN16 DN500 - HANDWHEEL
49A3444B2600	BV49A-3434B-F4-PN16 DN600 - HANDWHEEL

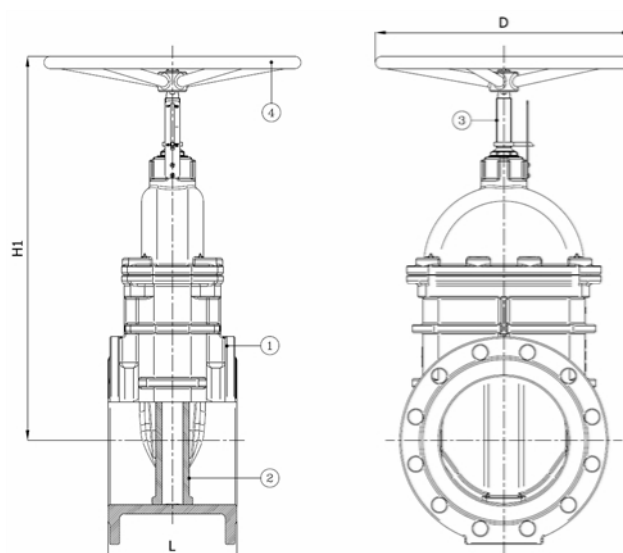

DN/Size	D	H1	L	Press.Cl.	Weight(kg)
DN200 (8")	450	647	230	PN16	60.20
DN250 (10")	500	753,5	250	PN16	91.00
DN300 (12")	500	815	270	PN16	110.00
DN350 (14")	550	867	290	PN16	190.00
DN400 (16")	550	941	310	PN16	245.00
DN450 (18")	550	1062	330	PN16	355.00
DN500 (20")	600	1141	350	PN16	425.00
DN600 (24")	700	1293	390	PN16	585.00

Item 1	Item 2	Item 3	Item 4
Body Material	Wedge Material	Stem Material	Actuator Material
Ductile iron : GGG50 + Epoxy coating	NBR vulcanized on ductile iron core GGG50	Stainless steel : AISI 420	Steel


BV49A-3434B-F4-PN10 - Handwheel

Gate valve, flanged PN10, resilient seated, F4 short face to face, with handwheel

Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref
49A2444B2200	BV49A-3434B-F4-PN10 DN200 - HANDWHEEL
49A2444B2250	BV49A-3434B-F4-PN10 DN250 - HANDWHEEL
49A2444B2300	BV49A-3434B-F4-PN10 DN300 - HANDWHEEL
49A2444B2350	BV49A-3434B-F4-PN10 DN350 - HANDWHEEL
49A2444B2400	BV49A-3434B-F4-PN10 DN400 - HANDWHEEL
49A2444B2450	BV49A-3434B-F4-PN10 DN450 - HANDWHEEL
49A2444B2500	BV49A-3434B-F4-PN10 DN500 - HANDWHEEL
49A2444B2600	BV49A-3434B-F4-PN10 DN600 - HANDWHEEL

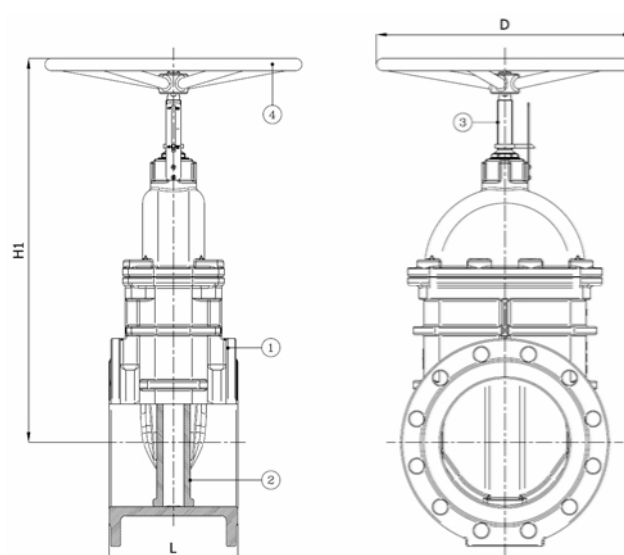

DN/Size	D	H1	L	Press.Cl.	Weight(kg)
DN200 (8")	450	647	230	PN10	58.00
DN250 (10")	500	753	250	PN10	90.00
DN300 (12")	500	815	270	PN10	133.00
DN350 (14")	550	867	290	PN10	180.00
DN400 (16")	550	941	310	PN10	261.00
DN450 (18")	550	1062	330	PN10	345.00
DN500 (20")	600	1141	350	PN10	415.00
DN600 (24")	700	1293	390	PN10	575.00

Item 1	Item 2	Item 3	Item 4
Body Material	Wedge Material	Stem Material	Actuator Material
Ductile iron : GGG50 + Epoxy coating	NBR vulcanized on ductile iron core GGG50	Stainless steel : AISI 420	Steel