


BV49A-3434B-F5-PN10/PN16 - HANDWHEEL

Gate valve, flanged PN16, resilient seated, F5 long face to face, with handwheel

Face to Face Standard: EN 558-1 series 15



Item Number	Belven Ref
49A3544B2040	BV49A-3434B-F5-PN16 DN040 - HANDWHEEL
49A3544B2050	BV49A-3434B-F5-PN16 DN050 - HANDWHEEL
49A3544B2065	BV49A-3434B-F5-PN16 DN065 - HANDWHEEL
49A3544B2080	BV49A-3434B-F5-PN16 DN080 - HANDWHEEL
49A3544B2100	BV49A-3434B-F5-PN16 DN100 - HANDWHEEL
49A3544B2125	BV49A-3434B-F5-PN16 DN125 - HANDWHEEL
49A3544B2150	BV49A-3434B-F5-PN16 DN150 - HANDWHEEL

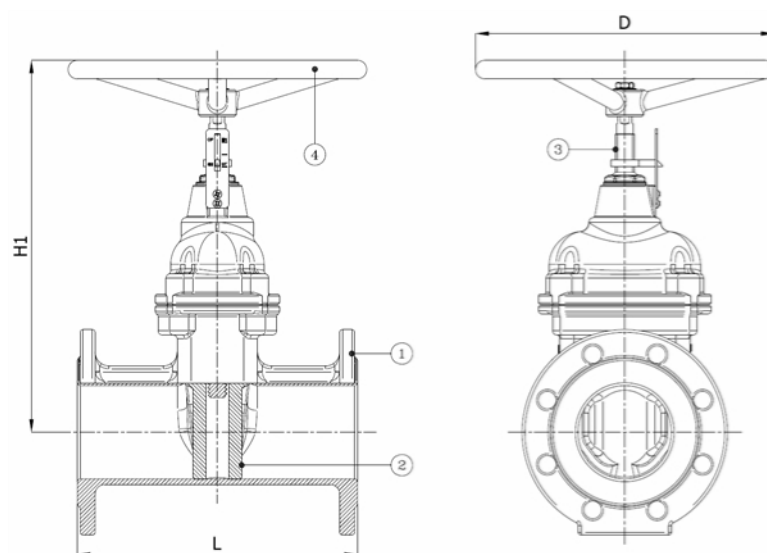

DN/Size	D	H1	L	Press.Cl.	Weight(kg)
DN40 (1 1/2")	200	264	240	PN16	9.80
DN50 (2")	200	280,5	250	PN16	11.30
DN65 (2 1/2")	250	311,5	270	PN16	13.50
DN80 (3")	250	367	280	PN16	16.80
DN100 (4")	320	398,5	300	PN16	22.70
DN125 (5")	320	463,5	325	PN16	30.30
DN150 (6")	320	501	350	PN16	40.00

Item 1	Item 2	Item 3	Item 4
Body Material	Wedge Material	Stem Material	Actuator Material
Ductile iron : GGG50 + Epoxy coating	NBR vulcanized on ductile iron core GGG50	Stainless steel : AISI 420	Steel


BV49A-3434B-F5-PN16 - HANDWHEEL

Gate valve, flanged PN16, resilient seated, F5 long face to face, with handwheel

Face to Face Standard: EN 558-1 series 15



Item Number	Belven Ref
49A3544B2200	BV49A-3434B-F5-PN16 DN200 - HANDWHEEL
49A3544B2250	BV49A-3434B-F5-PN16 DN250 - HANDWHEEL
49A3544B2300	BV49A-3434B-F5-PN16 DN300 - HANDWHEEL
49A3544B2350	BV49A-3434B-F5-PN16 DN350 - HANDWHEEL
49A3544B2400	BV49A-3434B-F5-PN16 DN400 - HANDWHEEL
49A3544B2450	BV49A-3434B-F5-PN16 DN450 - HANDWHEEL
49A3544B2500	BV49A-3434B-F5-PN16 DN500 - HANDWHEEL
49A3544B2600	BV49A-3434B-F5-PN16 DN600 - HANDWHEEL

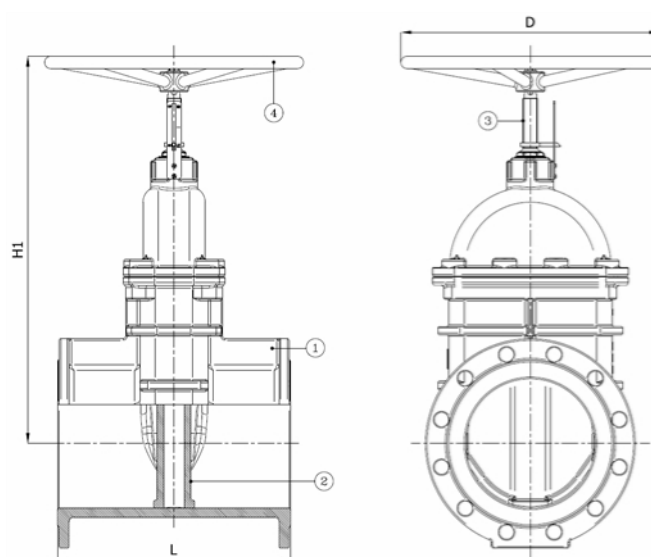

DN/Size	D	H1	L	Press.Cl.	Weight(kg)
DN200 (8")	450	647	400	PN16	69.00
DN250 (10")	500	753,5	450	PN16	106.00
DN300 (12")	500	815	500	PN16	148.00
DN350 (14")	550	867	550	PN16	225.00
DN400 (16")	550	941	600	PN16	294.00
DN450 (18")	550	1062	650	PN16	431.00
DN500 (20")	600	1141	700	PN16	519.00
DN600 (24")	700	1293	800	PN16	719.00

Item 1	Item 2	Item 3	Item 4
Body Material	Wedge Material	Stem Material	Actuator Material
Ductile iron : GGG50 + Epoxy coating	NBR vulcanized on ductile iron core GGG50	Stainless steel : AISI 420	Steel


BV49A-3434B-F5-PN10 - Handwheel

Gate valve, flanged PN10, resilient seated, F5 long face to face, with handwheel

Face to Face Standard: EN 558-1 series 15



Item Number	Belven Ref
49A2544B2200	BV49A-3434B-F5-PN10 DN200 - HANDWHEEL
49A2544B2250	BV49A-3434B-F5-PN10 DN250 - HANDWHEEL
49A2544B2300	BV49A-3434B-F5-PN10 DN300 - HANDWHEEL
49A2544B2350	BV49A-3434B-F5-PN10 DN350 - HANDWHEEL
49A2544B2400	BV49A-3434B-F5-PN10 DN400 - HANDWHEEL
49A2544B2450	BV49A-3434B-F5-PN10 DN450 - HANDWHEEL
49A2544B2500	BV49A-3434B-F5-PN10 DN500 - HANDWHEEL
49A2544B2600	BV49A-3434B-F5-PN10 DN600 - HANDWHEEL

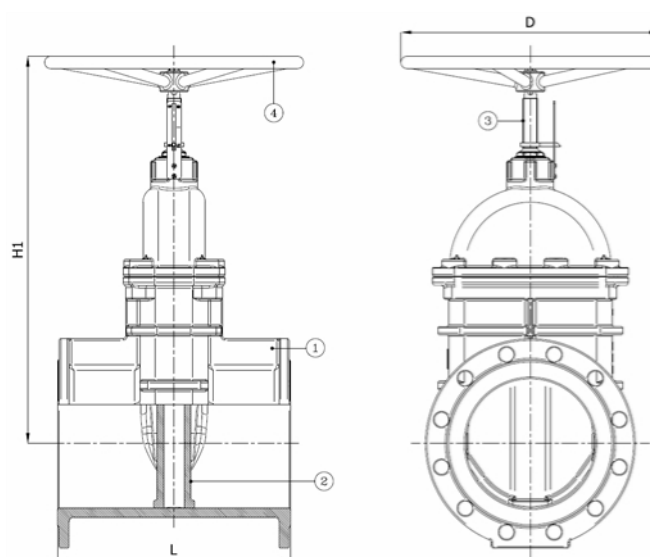

DN/Size	D	H1	L	Press.Cl.	Weight(kg)
DN200 (8")	450	647	400	PN10	60.50
DN250 (10")	500	753	450	PN10	106.00
DN300 (12")	500	815	500	PN10	148.00
DN350 (14")	550	867	550	PN10	225.00
DN400 (16")	550	941	600	PN10	294.00
DN450 (18")	550	1062	650	PN10	431.00
DN500 (20")	600	1141	700	PN10	519.00
DN600 (24")	700	1293	800	PN10	719.00

Item 1	Item 2	Item 3	Item 4
Body Material	Wedge Material	Stem Material	Actuator Material
Ductile iron : GGG50 + Epoxy coating	NBR vulcanized on ductile iron core GGG50	Stainless steel : AISI 420	Steel