berluto
Quality under pressure

Datasheet DRV 724 / 725

Pressure reducing valve with female thread • Standard pressure • Stainless steel

PRESSURES

Inlet pressure	max. 40 bar
Outlet pressure	1,5 - 20 bar



CONNECTIONS

Female thread acc. ISO 228 (G 1/2" up to G 2")
Optionallly with NPT-thread

SEALS AND TEMPERATURES

NBR	-15 °C up to +100 °C
EPDM	-30 °C up to +130 °C / with FDA conformity
FKM	-10 °C up to +190 °C

FEATURES

---- pressure compensation
---- diaphragm-controlled
---- continuously adjustable outlet pressure
---- with integrated strainer filter
---- replaceable inner parts/cartridge principle
---- double-sided G ¼" manometer fitting
(for outlet pressure)
---- assembly position: any desired, preferably vertical
---- min. pressure difference (inlet / outlet pressure): 1 bar




MEDIA


---- aggressive water / other aggressive liquids
---- air and neutral gases (at higher flow rates)

CONFORMITY / CUSTOMS TARIFF NUMBER / CLASSIFICATION SOCIETIES

---- DGRL 2014/68/EU
---- Customs tariff number *848 110 05*
---- Certifiable by external classification societies
e.g. DNV

Nominal size		15	20	25	32	40	50
G		1/2″	3/4″	1″	1 1/4″	1 1/2″	2″
Type			A				B
max. inlet pressure [bar]							
DRV 724			40				40
DRV 725			40				40
outlet pressure [bar]							
DRV 724			1,5 - 12				1,5 - 12
DRV 725			2,0 - 20				2,0 - 20
dimensions [mm]							
all types	G		1/2″	3/4″	1″	1 1/4″	1 1/2″	2″
	b		95	95	110	120	150	160
	h1		29	29	38	38	38	38
	h		133	133	133	133	243	243
weight [kg]							
DRV 724			1,7	1,6	2,5	2,5	6,8	6,6
DRV 725			1,7	1,7	2,6	2,5	6,8	6,7
kvs-value [m³/h]							
all types			2,9	3,9	5,4	6,1	9	13

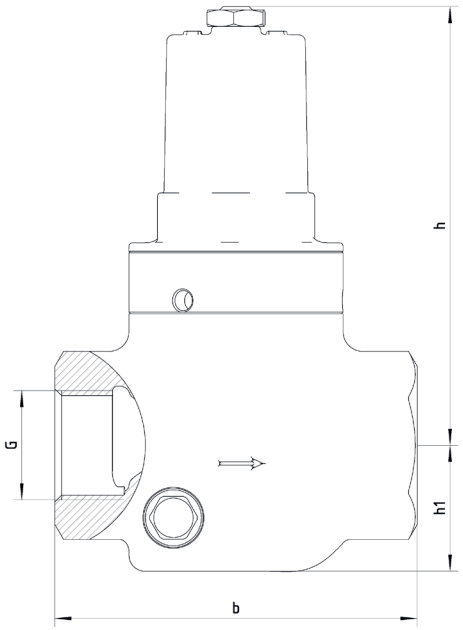



Article numbers and options

Article numbers

Nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

Standard version

DRV 724	072402	072403	072404	072405	072406	072407
DRV 725	072502	072503	072504	072505	072506	072507

Options overview

CC - connections

00 -	ISO 228	standard
30 -	NPT - ASME B1.20.1	

M - material of wetted inner parts

0 -	stainless steel 1.4404
9 -	stainless steel 1.4404 (including internal parts of the spring bonnet)

E - elastomers

0 -	FKM	standard
1 -	NBR	
8 -	EPDM	only DN 40 & DN 50

F - finishes

0 -	without additional finishes

Configuration example of an article number with additional options

art.no. standard version						-	C	C	M	E	F
0	7	2	5	0	7	-	3	0	0	8	0

inlet pressure: 25 bar
seals: EPDM

outlet pressure: 14 bar
temperature: 30 °C

connection: 2" NPT
without additional finishes


Manometer

diameter	connection	body	pressure range	max. temp.	art.no.
63 mm	G 1/4", central back	stainless steel	0 - 10 bar	190 °C	009014
63 mm	G 1/4", central back	stainless steel	0 - 20 bar	190 °C	009017

Materials

	body	spring bonnet	seals	wetted inner parts	max. temperature
standard	stainless steel 1.4408	stainless steel 1.4408	EPDM, FKM, NBR	stainless steel 1.4404	190 °C

Flow diagram

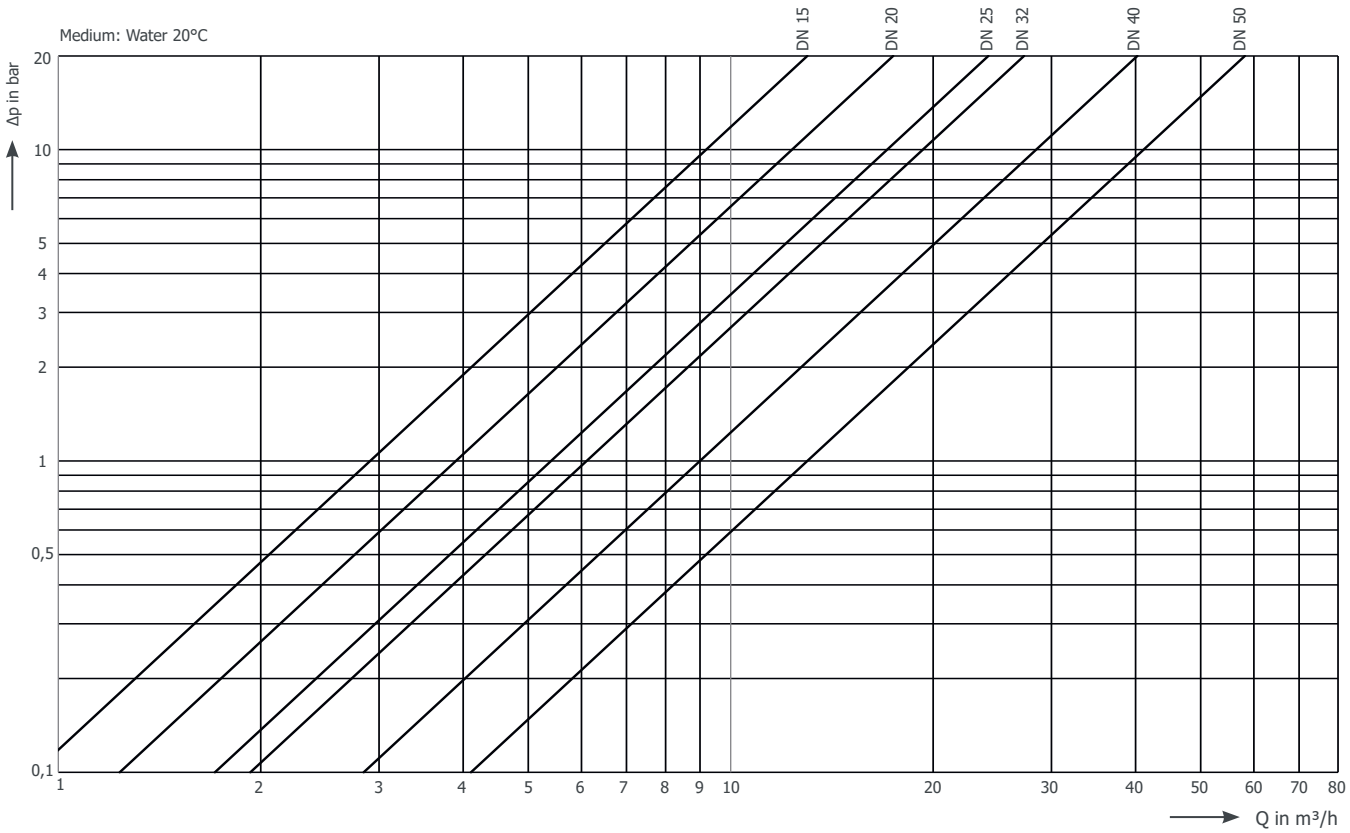


berluto
Quality under pressure

Datasheet DRV 724-R / 725-R

Pressure reducing valve with male thread • Standard pressure • Stainless steel

PRESSURES

Inlet pressure	max. 40 bar
Outlet pressure	1,5 - 20 bar

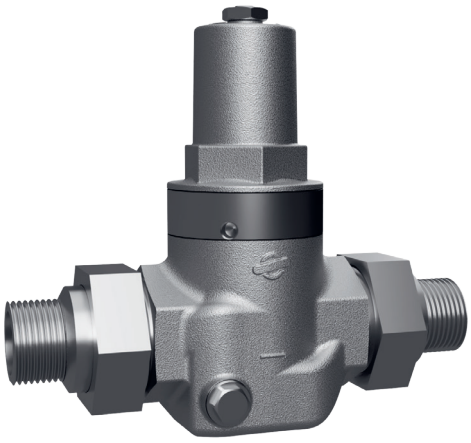

CONNECTIONS

Male thread acc. ISO 7 (R 1/2" up to R 2")

SEALS AND TEMPERATURES

NBR	-15 °C up to +100 °C
EPDM	-30 °C up to +130 °C /only DN 40 & DN 50
FKM	-10 °C up to +190 °C

FEATURES

---- pressure compensation
---- diaphragm-controlled
---- continuously adjustable outlet pressure
---- with integrated strainer filter
---- replaceable inner parts/cartridge principle
---- double-sided G ¼" manometer fitting
(for outlet pressure)
---- assembly position: any desired, preferably vertical
---- min. pressure difference (inlet / outlet pressure): 1 bar




MEDIA


---- aggressive water / other aggressive liquids
---- air and neutral gases (at higher flow rates)

CONFORMITY / CUSTOMS TARIFF NUMBER / CLASSIFICATION SOCIETIES

---- DGRL 2014/68/EU
---- Customs tariff number *848 110 05*
---- Certifiable by external classification societies
e.g. DNV

	Nominal size	15	20	25	32	40	50
	G	1/2″	3/4″	1″	1 1/4″	1 1/2″	2″
	Type	A				B	
	max. inlet pressure [bar]						
	DRV 724-R	40				40	
	DRV 725-R	40				40	
	outlet pressure [bar]						
	DRV 724-R	1,5 - 12				1,5 - 12	
	DRV 725-R	2,0 - 20				2,0 - 20	
	dimensions [mm]						
	G	1/2″	3/4″	1″	1 1/4″	1 1/2″	2″
	b	105	105	122	122	160	160
all types	b1	168	168	195	195	250	250
	h1	29	29	38	38	39	39
	h	133	133	133	133	243	243
	weight [kg]						
	DRV 724-R	1,9	1,9	3,2	3,3	8,0	7,9
	DRV 725-R	2,0	2,0	3,3	3,3	8,0	8,0
	kvs-value [m³/h]						
	all types	2,9	3,9	5,4	6,1	9	13

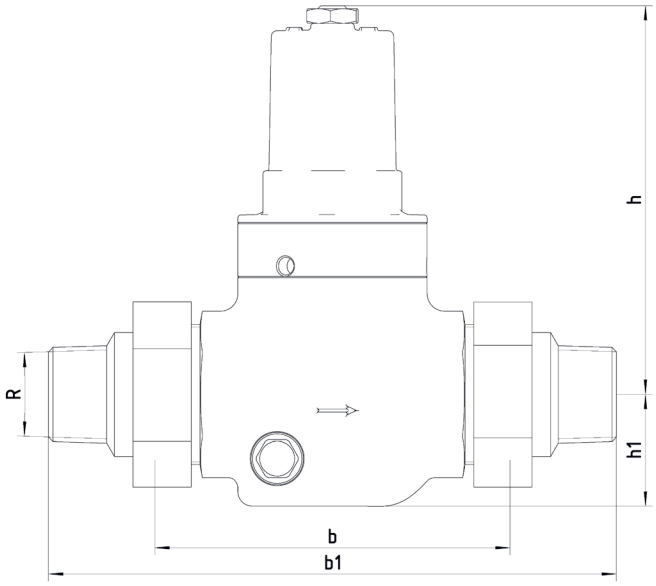



Article numbers and options

Article numbers

Nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

Standard version

DRV 724-R	072402-R0XXX	072403-R0XXX	072404-R0XXX	072405-R0XXX	072406-R0XXX	072407-R0XXX
DRV 725-R	072502-R0XXX	072503-R0XXX	072504-R0XXX	072505-R0XXX	072506-R0XXX	072507-R0XXX

Options overview

CC - connections

R0 -	ISO 7

M - material of wetted inner parts

3 -	stainless steel 1.4404
9 -	stainless steel 1.4404 (including internal parts of the spring bonnet)

E - elastomers

3 -	FKM	standard
1 -	NBR	
2 -	EPDM	only DN 40 & DN 50

F - finishes

0 -	without additional finishes

Configuration example of an article number with additional options

art.no. standard version						-	C	C	M	E	F
0	7	2	5	0	7	-	R	0	3	3	0

inlet pressure: 25 bar
seals: FKM

outlet pressure: 5 bar
temperature: 30 °C

connection: 2" ISO 7
without additional finishes

Manometer

diameter	connection	body	pressure range	max. temp.	art.no.
63 mm	G 1/4", central back	stainless steel	0 - 10 bar	190 °C	009014
63 mm	G 1/4", central back	stainless steel	0 - 20 bar	190 °C	009017

Materials

	body	spring bonnet	seals	wetted inner parts	max. temperature
standard	stainless steel 1.4408	stainless steel 1.4408	EPDM, FKM, NBR	stainless steel 1.4404	190 °C

Flow diagram

