

Ball Valve with Threaded Ends

BBF/KSG-V-HS, DN 10-50, PN 25


Full Bore



Standard Materials:

Body:	Steel
Ball:	Stainless Steel
Stem:	Stainless Steel
Ball seals:	PTFE
Stem seals:	EPDM

Operating Temperature: up to +150 °C

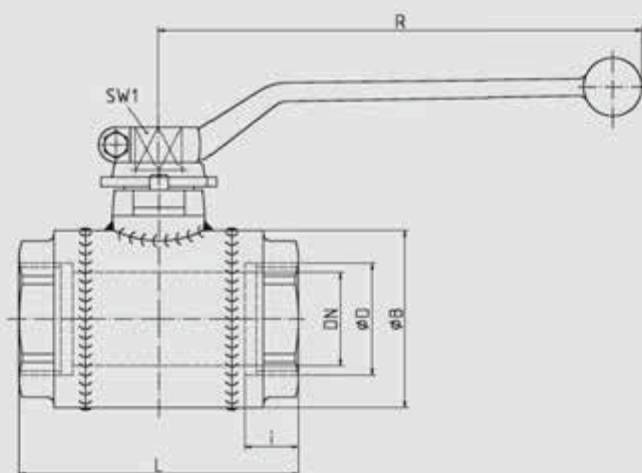

For deviating operating conditions please send us a written request stating the fluids, as well as the pressure and temperature range.

Further options for these ball valves are listed on page 48.

DN	PN	D	i	L	B	SW1	R	Weight	Item No.
mm	bar	mm	mm	mm	mm	mm	mm	kg	
10	25	G 3/8	12,5	75	39	10	100	0,7	005.0013
16	25	G 1/2	15	75	39	10	130	0,8	005.0003
20	25	G 3/4	18	80	44	10	130	0,9	005.0004
25	25	G 1	20	90	54	12	180	1,3	005.2782
32	25	G 1 1/4	21	110	64	16	205	2,2	005.2078
40	25	G 1 1/2	23	120	76	16	205	2,5	005.0060
50	25	G 2	24	140	89	16	205	3,5	005.3843