

Ball Valve for Venting and Draining with Flange and Weld End

BBF/FSL/KSF-V-HS | BBF/FSK/KSF-V-HS, DN 15-150, PN25



Standard Materials:


Body:	Forged Steel / Steel
Ball:	Stainless Steel
Stem:	Stainless Steel
Ball seals:	PTFE
Stem seals:	EPDM

Operating Temperature: up to +150 °C

Full Bore

Design features:

- From DN125 the trunnion mounted ball is standard.
- Suitable blind flanges and gaskets can be delivered on request.
- Flanges drilled and sized in accordance with EN 1092 – Nominal Pressure PN25.

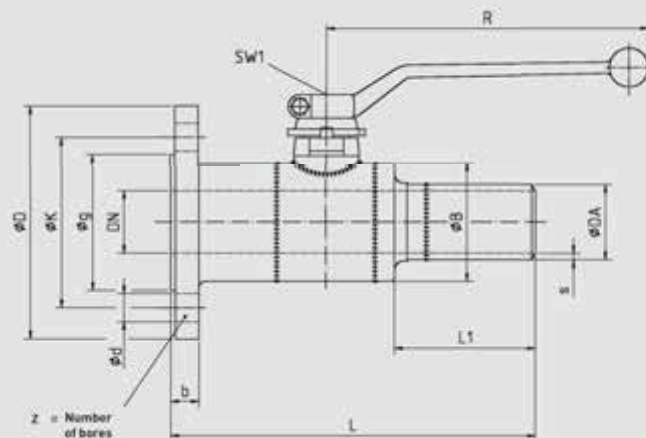

The Measurements of the flanges can be found on page 13 of this catalogue.

For deviating operating conditions please send us a written request stating the fluids, as well as the pressure and temperature range.

Further options for these ball valves are listed on page 48.

DN	PN	Da	s	L	L1	B	D	R	SW1	Weight	Item No.
mm	bar	mm	mm	mm	mm	mm	mm	mm	mm	kg	
15	25	21,3	2,6	200	104	39	95	130	10	1,7	050.0724
20	25	26,9	3,2	210	103	44	105	130	10	2,3	050.6489
25	25	33,7	3,2	215	100	54	115	180	12	3,1	050.9847
32	25	42,4	3,2	200	94	64	140	205	16	4,2	050.0141
40	25	48,3	3,2	205	91	76	150	205	16	5,2	050.0142
50	25	60,3	3,6	200	78	89	165	205	16	7,8	050.0143
65	25	76,1	3,6	280	80	121	185	300	16	11,6	050.0773
80	25	88,9	4,0	295	78	140	200	350	22	14,2	050.0732
100	25	114,3	4,0	325	80	171	235	350	22	21,9	050.0743
125	25	139,7	4,5	338	90	203	270	500	22	33,0	050.0753
150	25	168,3	5,0	375	90	254	300	600	32	58,0	050.1501