

# Ball Valve for Venting and Draining with Flange and Weld End

**BBF/FSL/KSF-R-HS | BBF/FSK/KSF-R-HS, DN25-50, PN25**

Reduced Bore




## Standard Materials:

<b>Body:</b>	Forged Steel / Steel
<b>Ball:</b>	Stainless Steel
<b>Stem:</b>	Stainless Steel
<b>Ball seals:</b>	PTFE
<b>Stem seals:</b>	EPDM

**Operating Temperature:** up to +150 °C

## Design features:

- Suitable blind flanges and gaskets can be delivered on request.
- Flanges drilled and sized in accordance with EN 1092 – Nominal Pressure PN25.

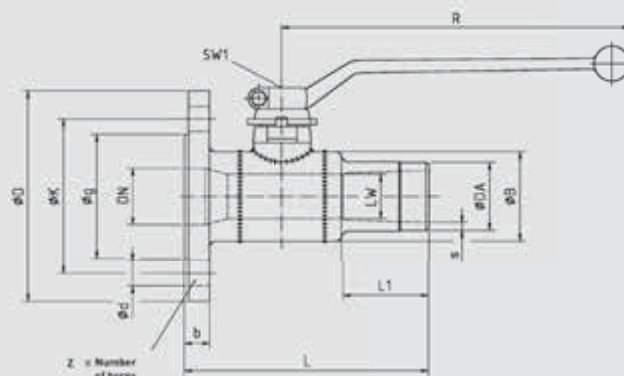

The Measurements of the flanges can be found on page 13 of this catalogue.

For deviating operating conditions please send us a written request stating the fluids, as well as the pressure and temperature range.

Further options for these ball valves are listed on page 48.

DN/LW	PN	Da	s	L	L1	B	D	R	SW1	Weight	Item No.
mm	bar	mm	mm	mm	mm	mm	mm	mm	mm	kg	
25/20	25	33,7	2,3	212	102	44	115	130	10	2,6	050.5397
32/25	25	42,4	3,2	170	70	54	140	180	12	3,7	050.5010
40/32	25	48,3	3,2	175	65	64	150	205	16	4,5	050.5011
50/40	25	60,3	3,6	185	70	76	165	205	16	5,9	050.5012