

Hot Tapping Ball Valve

BBF/KSF-V-HE, DN 20-100, PN 25

Full Bore




Standard Materials:

- Body:** Forged Steel / Steel
- Ball:** Stainless Steel
- Stem:** Stainless Steel
- Ball seals:** PTFE
- Stem seals:** EPDM

Operating Temperature: up to +150 °C

Design features:

- Delivery includes a cap for proper weld execution in accordance with "AGFW Arbeitsblatt FW401".
The installation instructions (included in the delivery) must be followed!
- Stem design with double o-ring seals.
- A suitable drilling system can be purchased at www.huetz-baumgarten.de. Further information is available on page 47 of this catalogue.

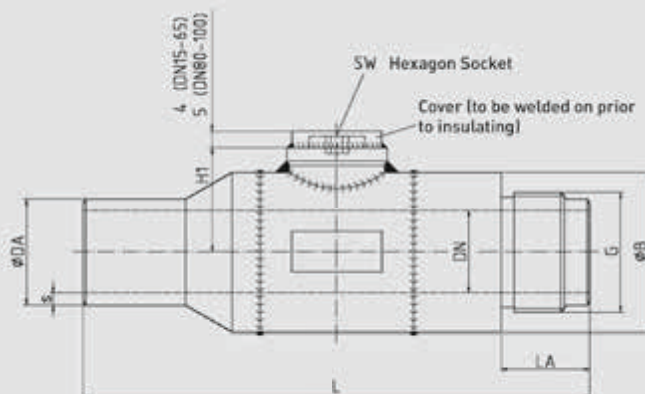

For deviating operating conditions please send us a written request stating the fluids, as well as the pressure and temperature range.

Larger diameters available on request.

Further options for these ball valves are listed on page 48.

DN	PN	Da	s	L	B	LA	G	H1	SW	Weight	Item No.
mm	bar	mm	mm	mm	mm	mm	mm	mm	mm	kg	
20	25	26,9	3,2	170	44	35	G 1 A	31,6	6	1,1	010.2892
25	25	33,7	3,2	180	54	35	G 1 ½ A	35	6	1,7	010.4272
32	25	42,4	3,2	200	63,5	35	G 1 ½ A	49,5	10	2,4	010.4276
40	25	48,3	3,2	210	76	55	G 2 ½ A	55	10	3,4	010.4283
50	25	60,3	3,6	240	90	55	G 2 ½ A	62,5	10	4,9	010.4295
65	25	76,1	3,6	260	121	55	G 2 ¾ A	77,5	10	8,2	010.4297
80	25	88,9	4,0	280	140	30	G 3 A	100	12	10,7	010.4417
100	25	114,3	4,0	300	171	30	G 4 A	114	12	16,6	010.4420